

**Surveyed Position:**

59° 40.637'N

38° 34.121'W

Depth (corrected): 2984 m

AR30-03

1455 m Depth

Hardware Required (per mooring without spares)	
(37)	1/2" Anchor Shackle (SH)
(8)	5/8" Anchor Shackle
(1)	3/4" Anchor Shackle
(2)	7/8" Anchor Shackle
(24)	5/8" Sling Link (SL)
(1)	1-1/4" Master Link
(1)	3 ton Swivel with Anode

Hardware Designation	
(A)	(2) 1/2" SH, (1) 5/8" SL
(B)	(1) 1/2" SH, (1) 5/8" SL, (1) 5/8" SH
(C)	(1) 1/2" SH, (1) 5/8" SL, (1) 3/4" SH
(J)	(1) 1/2" SH, (1) 5/8" SL, (1) 7/8" SH
(M)	Master Link
(S)	Swivel


**Note A**  
Mooring to be deployed using Lebus Winch

**Note B**  
Instrument Depth is 40 meters off Bottom

Table A MicroCat Depth and Marking		
Instrument	Measure (m)	Mark (m)
SBE 37 SMP	248.7	1750

Table B MicroCat Depth and Marking		
Instrument	Measure (m)	Mark (m)
SBE 37 SMP	151.2	2000

Table C MicroCat Depth and Marking		
Instrument	Measure (m)	Mark (m)
SBE 37 SMP	56.2	2500
SBE 37 SMP	306.2	2750

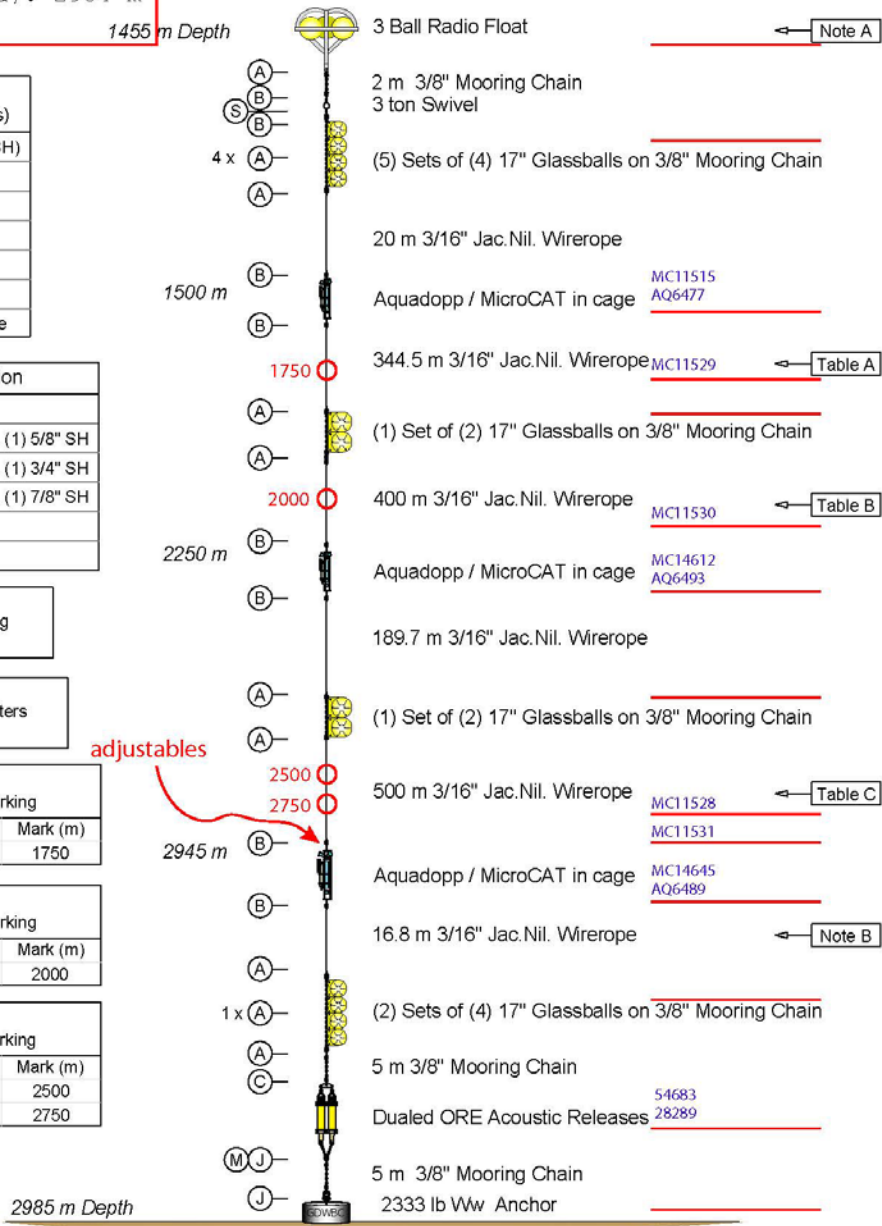

**GDWBC-M4**

Greenland Deep Western  
Boundary Current  
As Deployed - HFurey 15JUN2018

Woods Hole Oceanographic Institution  
designed by John Kemp, drawn by Jim Ryder  
file: OSNAP Bow or date: 02/20/2018