

Surveyed Position:
 59° 49.021'N
 40° 16.710'W
 Depth (corrected): 2557 m
 AR30-03

Hardware Required (per mooring without spares)	
(35)	1/2" Anchor Shackle (SH)
(12)	5/8" Anchor Shackle
(1)	3/4" Anchor Shackle
(2)	7/8" Anchor Shackle
(25)	5/8" Sling Link (SL)
(1)	1-1/4" Master Link
(1)	3 ton Swivel with Anode


Hardware Designation	
(A)	(2) 1/2" SH, (1) 5/8" SL
(B)	(1) 1/2" SH, (1) 5/8" SL, (1) 5/8" SH
(C)	(1) 1/2" SH, (1) 5/8" SL, (1) 3/4" SH
(J)	(1) 1/2" SH, (1) 5/8" SL, (1) 7/8" SH
(M)	Master Link
(S)	Swivel

Note A
 Mooring to be deployed using
 Lebus Winch

Note B
 Instrument Depth is 40 meters
 off Bottom

Table A MicroCat Depth and Marking		
Instrument	Measure (m)	Mark (m)
SBE 37 SMP	248.8	1250

Table B MicroCat Depth and Marking		
Instrument	Measure (m)	Mark (m)
SBE 37 SMP	248.7	1750

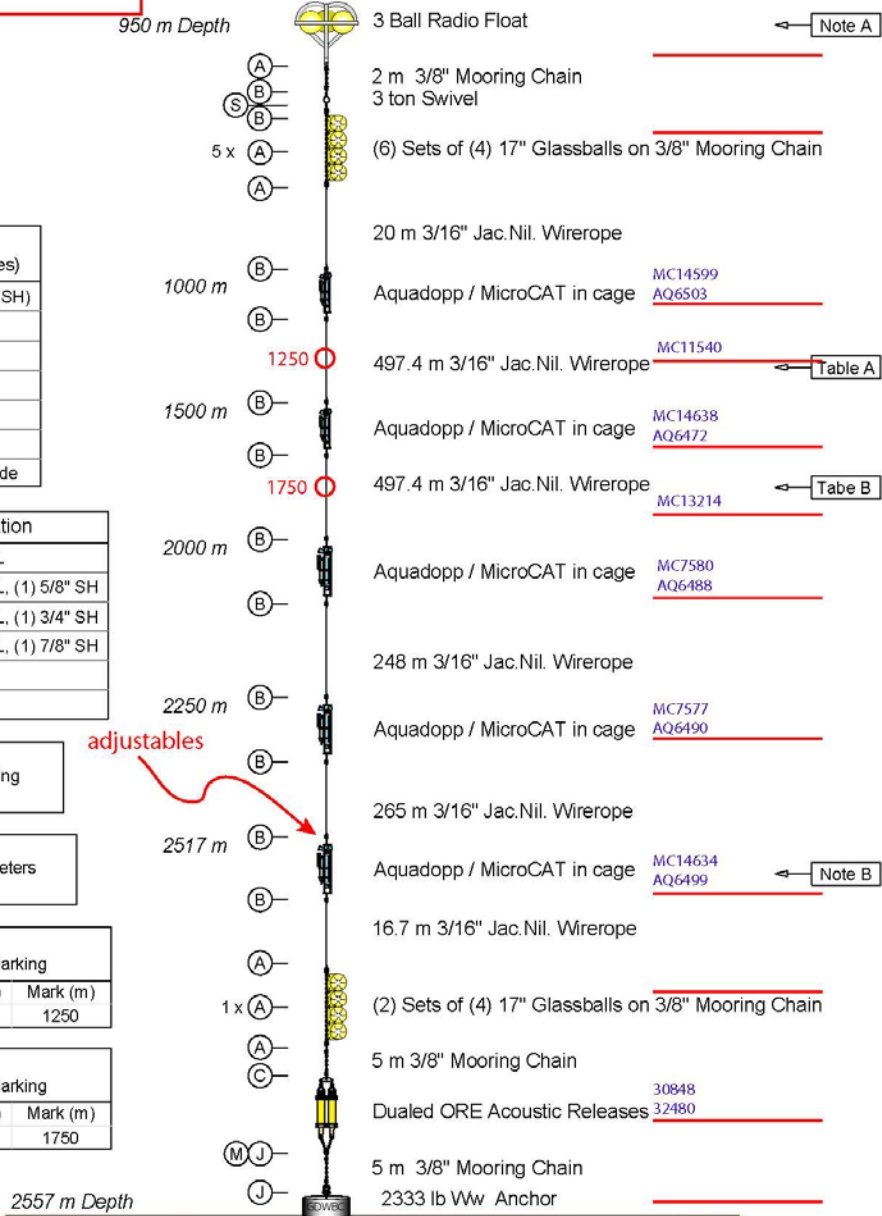

GDWBC-M3

Greenland Deep Western
 Boundary Current
 As Deployed - hfurey 19 June 2018

Woods Hole Oceanographic Institution
 designed by John Kemp, drawn by Jim Ryder
 file: OSNAP Bow or date: 02/20/2018